

JP-PTZ-260




Specifications

Image Sensor	CCD Hitachi 26X
Sync System	Internal
Scan System	2:1 Interlacing
Definition	Horizontal : 480 / 570 TV Lines
Sensitivity	0.7 / 0.01 Lux
Iris / Focus	Auto / Manual
Magn Fication	26X (Optical Zoom Lens)
Zoom Length	3.5 - 91 mm
Back Light Compensation	Off /Auto
Gain Control	Auto/Manual
Shield Windows	Setable
Signal Format	PAL /NTSC
S/N	>50dB
Video Output	1.0 +-0.2V p-p
Video Output	Female BNC
Baud Rate	2400/4800/9600/19200 bps
Protocol	PELCO,ALEC,VCL,MOLYNX,VICON,SANTACHI,PANASONIC SAMSUNG,SAE,DIAMOND,KALATEL,LILIN,ADT SECUPRO
Address Setting	0-255
Pan Rotation	360' continuously
Tilt Rotation	90' with auto flip
Ratation Speed	Pan 0.4 - 100' /S , Tilt 0.4 - 100' /S
Preset	128 Presets and speed 200' / sec
Monitor Way	Preset/Tour/Scan/Pattern
Operation Environment	-20 - +50 °C (Outdoor) , Humidity 95% no compensation
Protection Grade	IP66 Weather Proof Housing TVS 4500W Lightning Proof Surge
Power Supply	AC24V (50W)
Weight	3.85 Kg , Material All Aluminium Structure

FEATURES

- > Pan/Tilt/Zoom Dome
- > 1/4" SONY Exview HAD CCD
- > Zoom 26X , Lens 3.5-91mm
- > Color 480 TVL. B/W 570 TVL
- > 0.7 Lux. B/W 0.01 lux
- > 128 Preset, Speed 200'/Sec
- > Support Multi Protocol
- > Built-in Blower, IP66

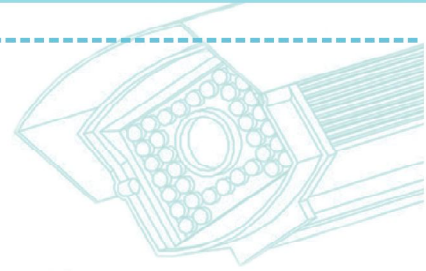

>> We live in quality We win on service.

