

WANN

Features




JP-VB101TR

- Active Transmitter Video Balun
- PAL / NTSC / SECOM All system compatible
- For colour signal up to 1500m (4900 feet)
- 2 Level adjustment for brightness and acutance
- Open on spot and easy adjustment
- Convenient installation designd
- High image quality as same original

Specifications

Video Bandwidth	DC - 6MHz
Attenuation	Maximum 1.5dB
Common Mode/Differential Mode	15KHz - 5MHz Typical 60dB
Resistance BNC Coax	75 ohm
Connector UTP Cable	100 ohm
Power Supply	DC 12V , 40mA
Cable Specification	24AWG or Thicker Cat-3 above
Resistance	100 ohm
DC Loop Resistance	18 ohm / 100m
Differential Capacitor	62 pf/m
Temperature	Operating -25 C to 70 C
Humidity	0 ~ 95 %
Anti Transient Ability	6000V 1.2uS x 50uS
Weight	75g
Dimension	76(L) x 76(W) x 27(H) mm

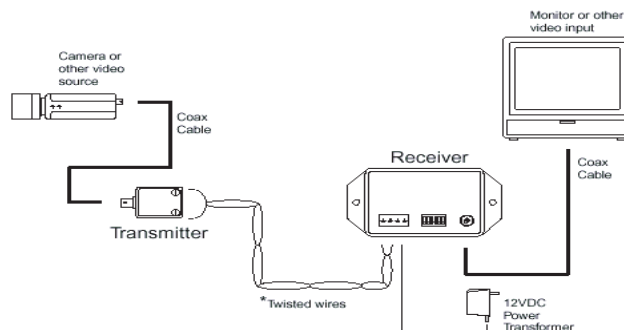

นำเข้า จัดจำหน่าย ติดตั้ง และบริการโดย



บริษัท ไออีเอส อินเตอร์คอนเน็ค (ประเทศไทย) จำกัด
 IES Interconnect (Thailand) Co.,Ltd

338/288-289 Soi Ladprao 87 (Jantrasuk) Ladprao Rd. Wangthonglang Bangkok 10310

Tel : 0-2935-9900 Auto Fax : 0-2935-9950 www.wann.co.th