

WANN

Features




JP-VB12TR

- Passive Transceiver Video Balun
- PAL / NTSC / SECOM All system compatible
- 17 cm Pigtail for convenient connection with camera
- For colour signal up to 300m (1000 feet)
- Screwless terminal block reduces
- Convenient installation designd
- High image quality as same original

Specifications

Video Bandwidth	DC - 6MHz
Attenuation	Maximum 1.5dB
Common Mode/Differential Mode	15KHz - 5MHz Typical 60dB
Resistance BNC Coax	75 ohm
Connector UTP Cable	100 ohm
Cable Specification	24AWG or Thicker Cat-3 above
Resistance	100 ohm
DC Loop Resistance	18 ohm / 100m
Differential Capacitor	62 pf/m
Temperature	Operating -20 C to 75 C
Humidity	0 ~ 95 %
Anti Transient Ability	6000V 1.2uS x 50uS
Weight	25 g
Dimension	61.8(L) x 20(W) x 17.8(H) mm

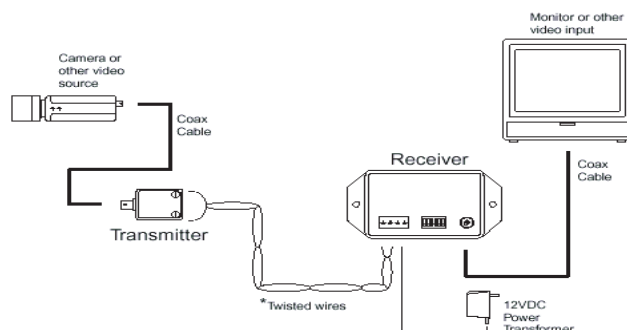

นำเข้า จัดจำหน่าย ติดตั้ง และบริการโดย



บริษัท ไออีเอส อินเตอร์คอนเน็ค (ประเทศไทย) จำกัด
 IES Interconnect (Thailand) Co.,Ltd

338/288-289 Soi Ladprao 87 (Jantrasuk) Ladprao Rd. Wangthonglang Bangkok 10310

Tel : 0-2935-9900 Auto Fax : 0-2935-9950 www.wann.co.th